

ALEXO®

The classic parasol since 1931



Glatz 

Assortment

Nominal size	Number of ribs	Order no. without flounce	Order no. with flounce
cm			
Ø 200	10 parts	180 00 200 751	180 00 200 750
Ø 220	10 parts	180 00 220 751	180 00 220 750


Nominal size	Lateral distance	Pole Ø	Area covered	Height closed/ with flounce	Clear headroom/ with flounce	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
A	AS	M	B	E ¹ /E ²	F ¹ /F ²	G	C	kg	km/h (wind force)
Ø 200	190	3.0	2.9	135/125	215/200	245	40 × 40	30	20 (4)
Ø 220	210	3.0	3.6	125/115	210/195	245	40 × 40	30	20 (4)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).


The measures of the height are determined by the ST ground socket. If one of the offered bases is used, these measures change only slightly. Apart from the steel base minus 5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage



10 parts

Accessories

Absolutely
necessary

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover		350 01 609 983
---	------------------	--	----------------

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets

4	Ground socket ST, hot-dip galvanised steel	Connection tube ST	350 01 205 105
---	--	--------------------	----------------

Wall consoles

5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
---	--	----------------	----------------

Bases

6	Concrete base Z, 30 kg, Ø 47 × 10 cm, light concrete	Support tube Z	350 01 111 016
6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 111 116
6	¹ Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
7	1/2 Natural granite base Z, 30 kg, 50 × 33 × 7 cm, natural stone	Support tube Z	350 01 109 480
8	Natural granite base Z, 40 kg, 50 × 50 × 8 cm, natural stone. Available from approx. March 2025. NEW	Support tube Z	350 01 109 467
9	³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
9	^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
10	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
11	³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel Available from approx. february 2025. NEW		350 01 101 001
11	^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 101 000

Bases with castors

12	^{1,3} Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
----	--	----------------	----------------

Various fixation types

13	Lawn spike Z, 85 × 150 × 350 mm, hot-dip galvanised steel	Support tube Z	350 01 205 400
----	---	----------------	----------------


Support tubes/Connection tubes

14	Support tube Z, Ø 25–33 mm, hot-dip galvanised steel		350 01 200 135
15	Connection tube ST, Ø 25–33 mm, hot-dip galvanised steel		350 01 205 100

¹ while stocks last


³ only suitable for smooth, joint free surface coverings

⁸ suitable for corrosive environments

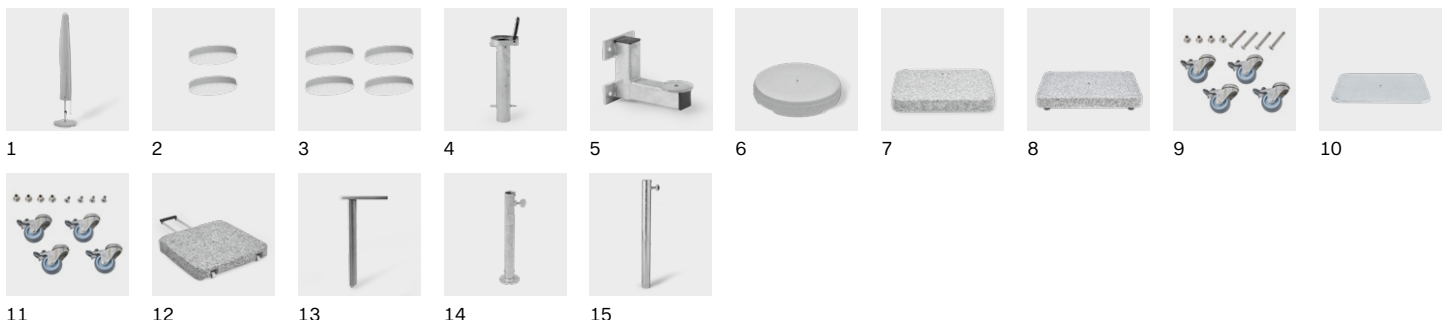




Frame	<p>10 parts Pole Ø 30 mm Die-cast zinc gear joint Ribs made from flexible, break-proof fibreglass Function: Tiltable to 90° Frame roof: round</p>
Frame colour	Swiss ash wood, colourless varnish
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 % Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p>
Flounce	<p>Available with or without The material on the version without flounce is reinforced with leather edges</p>
Protective cover	Can be ordered as an optional extra



Usage locations



Type of fastening



Valid from 1.1.2025
glatz.com