

FORTANO®

The windproof side-mast parasol



Glatz 

Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural	Order no. Frame anthracite
□	300×300	8 parts	094 00 310 171	094 00 310 301
□	400×300	8 parts	094 00 402 171	094 00 402 301

Nominal size	Lateral distance	Pole Ø	Area covered	Crank handle height	Height closed	Clear headroom	Total height/open	Height of pole	Overhang at the back	Length of free-arm	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M ¹	B	D	E	F	G ¹ /G ²	M ²	N	Z	C		
300×300	-	6.6×9.5	9	106	105	215	320/270	265	12	175	60×60	180	55 (7)
400×300	-	6.6×9.5	12	106	65	215	320/270	265	12	175	60×60	180	45 (6)



The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket M4. With the base M4, 120 kg these vary by plus 11.5 cm and with the base M4, 180 kg by plus 15.5 cm.

The lowest height for opening/closing is 5 cm below the closing height.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

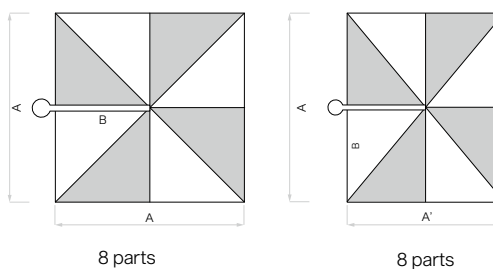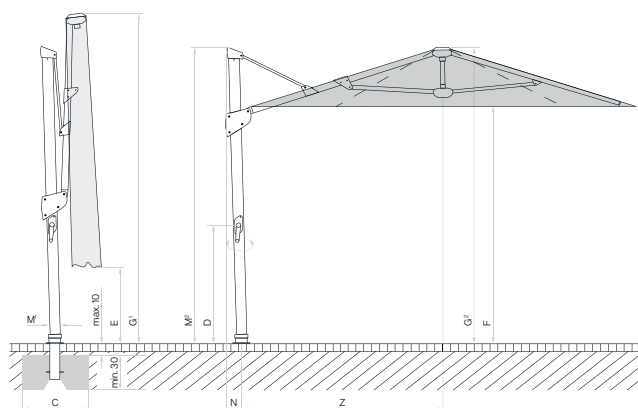

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage

Accessories

**Absolutely
necessary**


Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod for 300×300 and 400×300 cm	350 01 221 502
---	--	----------------

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

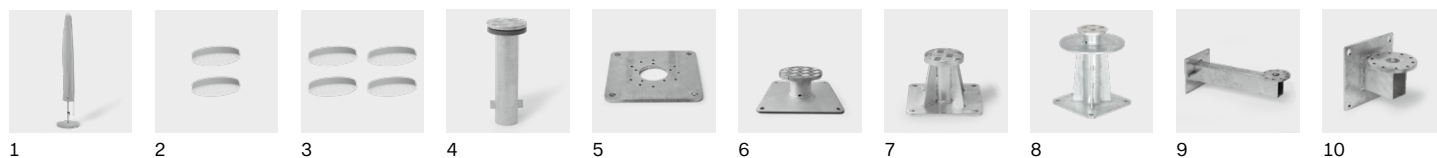

1

2

3

4

5

6

7

8

9

10

Fixations		Absolutely necessary	Order no.
Ground sockets			
4	Ground socket M4, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 226 510
Mounting plates			
5	Mounting plate M4 / M8, 30×30×1.5 cm, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 226 921
6	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 226 932
7	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 226 930
8	Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure (higher on request), hot-dip galvanised steel ^{NEW}	Pedestal M4 / turnable base M4	350 01 222 510
Wall consoles			
9	Wall console M4, extension 480 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 229 405
10	Wall console M4, extension 100 mm, hot-dip galvanised steel	Pedestal M4 / turnable base M4	350 01 229 410
Bases			
11	Base frame M4, 180 kg, (for 12 plates 40×40×4 cm), 91×91×15.5–19.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Pedestal M4 / turnable base M4	350 01 108 335
	Slab set, 12 pieces, 40×40×4 cm, (approx. 165 kg), concrete		350 01 226 907
	Slab set, 12 pieces, 40×40×4 cm, (approx. 170 kg), 8 pieces concrete, 4 pieces in granite-look		350 01 226 906
12	Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anodised aluminium look		350 01 100 717
13	Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anthracite		350 01 100 730
14	³⁶ Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
Bases with castors			
15	³⁷ Base frame with castors M4, 180 kg, 94×94×14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Pedestal / turnable base M4 + Decorative plate	350 01 113 810
16	³⁷ Base frame with castors M4, 180 kg, 94×94×14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Pedestal / turnable base M4 + Decorative plate	350 01 113 820
	Weight Set for base with castors M4, 180 kg, 4 pieces, concrete, (Weight Set approx. 150 kg)		350 01 110 800
17	Decorative plate in grey white RAL 9002 for base with castors M4, 180 kg, aluminium composite		350 01 113 910
18	Decorative plate in anthracite RAL 7016 for base with castors M4, 180 kg, aluminium composite		350 01 113 920
Pedestals/turnable bases			
19	Pedestal M4 for Fortano, galvanised steel, anthracite		350 01 220 960
20	Turnable base M4 for Fortano, galvanised steel, anthracite		350 01 220 970
19	Pedestal M4 for Fortano, galvanised steel, graphite grey		350 01 220 940
20	Turnable base M4 for Fortano, galvanised steel, graphite grey		350 01 220 950

³ only suitable for smooth, joint free surface coverings

⁶ Not suitable for cover for M4 base

⁷ 180 kg: Ground clearance 13 mm




11



12



13



14




15



16



17



18



19




20



Frame	<p>8 parts</p> <p>Mast profile oval 66 × 95 × 3 mm</p> <p>Crank drive for opening and closing</p> <p>Closable over covered tables (65–105 cm)</p> <p>Opposite opening principle for particularly high closing height</p> <p>Synchronous opening principle</p> <p>Optionally with turnable base for 360° rotation</p> <p>Canopy self-tensing through flexible rib ends</p> <p>Frame roof: square, rectangular</p>
Frame colour	Aluminium, anodised or anthracite powder-coated (RAL 7016)
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 %</p> <p>Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p> <p>Fabric Quality 2: polyester, 220 g/m², UV protection > 98 %, (only in anthracite frame)</p>
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyrion Spot LED with integrated battery pack



Usage locations



Type of fastening



FORTANO®,
Int. Patents reg.

Valid from 1.1.2025
glatz.com