

FORTELLO® / FORTELLO® LED




The windproof garden parasol



Glatz 



Assortment

	Nominal size without flounce	Number of ribs	Order no. with LED	Order no. without LED
	cm Ø 400	8 parts	328 00 400 171 ²	325 00 400 171
	300×300	8 parts	328 00 301 171 ²	325 00 301 171
	350×350	8 parts	328 00 351 171 ²	325 00 351 171
	400×400	8 parts	328 00 401 171 ²	325 00 401 171
	400×300	8 parts	328 00 402 171 ²	325 00 402 171

² Parasol without battery pack. Battery pack must be ordered as an accessory. Not recommended for coastal regions.

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M	B	E	F	G	H	C		
Ø 400	370	6.7	11.3	135	215	345	280	80×80	120	80 (9)
300×300	-	6.7	9	125	215	345	270	80×80	120	90 (10)
350×350	-	6.7	12.3	110	215	365	280	80×80	120	80 (9)
400×400	-	6.7	16.0	95	215	385	290	100×100	180	70 (8)
400×300	-	6.7	12	130	215	375	290	80×80	120	80 (9)



The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket M4. With the base M4, 120 kg these vary by plus 11.5 cm and with the base M4, 180 kg by plus 15.5 cm. With the natural granite base, 120 kg these vary by plus 9.5 cm and with the natural granite base with set of castors by plus 14 cm.


Using PX ground socket with adapter on M4 leaves an additional 10.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

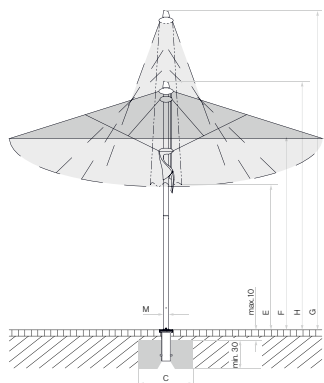

8 parts




8 parts



8 parts

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth), Guarantee
water drainage

 LED positions on the Fortello LED

Accessories

**Absolutely
necessary**

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod		350 01 609 701
---	-----------------------------------	--	----------------

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
	² Battery pack, 14.4 V, 6.8 Ah, 100 Wh		350 01 565 500

Fixations

Ground sockets

4	Ground socket PX, hot-dip galvanised steel	Adapter PX to M4 + support tube M4, P ²	350 01 207 001
5	Ground socket M4, hot-dip galvanised steel	Support tube M4, P ²	350 01 226 510

Adapters

6	Adapter PX to M4	Support tube M4, P ²	350 01 221 800
---	------------------	---------------------------------	----------------

Mounting plates

7	Mounting plate M4/M8, 30 × 30 × 1.5 cm, hot-dip galvanised steel	Support tube M4, P ²	350 01 226 921
8	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4, P ²	350 01 226 932
9	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4, P ²	350 01 226 930
10	Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure, hot-dip galvanised steel <small>NEW</small>	Support tube M4, P ²	350 01 222 510

Wall consoles

11	Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4, P ²	350 01 229 405
12	Wall console M4, extension 100 mm, hot-dip galvanised steel	Support tube M4, P ²	350 01 229 410

² Parasol without battery pack. Battery pack must be ordered as an accessory. Not recommended for coastal regions.



Fixations	Absolutely necessary	Order no.
Bases		
13 Base frame M4, 120 kg, (for 8 plates 40×40×4 cm), 91×91×11.5–15.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4, P'	350 01 108 235
Slab set, 8 pieces, 40×40×4 cm, (approx. 110 kg), concrete		350 01 226 908
Slab set, 8 pieces, 40×40×4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
14 Cover for M4 base 120 kg, 96×96×11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
15 Cover for M4 base 120 kg, 96×96×11.5 cm, plastic ABS coated, anthracite		350 01 100 630
13 Base frame M4, 180 kg, (for 12 plates 40×40×4 cm), 91×91×15.5–19.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4, P'	350 01 108 335
Slab set, 12 pieces, 40×40×4 cm, (approx. 165 kg), concrete		350 01 226 907
Slab set, 12 pieces, 40×40×4 cm, (approx. 170 kg), 8 pieces concrete, 4 pieces in granite-look		350 01 226 906
14 Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anodised aluminium look		350 01 100 717
15 Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anthracite		350 01 100 730
16 ^{3.6} Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
17 Natural granite base M4, 120 kg, 87 x 87 x 9.5 cm, natural stone NEW	Support tube M4, P'	350 01 109 495
18 ³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
18 ^{3.8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
Bases with castors		
19 ^{3.7} Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P' + decorative plate	350 01 113 610
20 ^{3.7} Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P' + decorative plate	350 01 113 620
Weight Set for base with castors M4, 120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)		350 01 110 500
21 Decorative plate in grey white RAL 9002 for base with castors M4, 120 kg, aluminium composite		350 01 113 710
22 Decorative plate in anthracite RAL 7016 for base with castors M4, 120 kg, aluminium composite		350 01 113 720
19 ^{3.7} Base frame with castors M4, 180 kg, 94 × 94 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P' + decorative plate	350 01 113 810
20 ^{3.7} Base frame with castors M4, 180 kg, 94 × 94 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P' + decorative plate	350 01 113 820
Weight Set for base with castors M4, 180 kg, 4 pieces, concrete, (Weight Set approx. 150 kg)		350 01 110 800
21 Decorative plate in grey white RAL 9002 for base with castors M4, 180 kg, aluminium composite		350 01 113 910
22 Decorative plate in anthracite RAL 7016 for base with castors M4, 180 kg, aluminium composite		350 01 113 920
Support tubes/Connection tubes		
23 Support tube M4, P', hot-dip galvanised steel		350 01 200 235

¹ while stocks last

³ only suitable for smooth, joint free surface coverings

⁶ Not suitable for cover for M4 base

⁷ 120 kg / 180 kg: Ground clearance 13 mm

⁸ suitable for corrosive environments

FORTELLO® / FORTELLO® LED



Frame	<p>8 parts Two-part profiled mast 67 × 3 mm Opposite opening principle for easy opening Quick and easy operation thanks to tensioning lever Closable over covered tables (95–135 cm) Runner and crown made from robust die-cast aluminium Screws and rivets made from stainless steel Canopy self-tensing through flexible rib ends Frame roof: round, square, rectangular FORTELLO LED: Dimmable LED strips with battery pack integrated in ribs Colour temperature approx. 2,700 K (warm white), 3,200 lumen, lighting duration at recommended brightness 10 h</p>
Frame colour	Aluminium, anodised
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 % Fabric Quality 2: polyester, 220 g/m ² , UV protection > 98 %
Flounce	Only available without
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyrion Spot LED with integrated battery pack



Usage locations



Type of fastening



FORTELLO®,
© Int. Design reg.

Valid from 1.1.2025
glatz.com