

PIAZZINO

The long-lasting wooden parasol




Glatz 

Assortment



	Nominal size without flounce	Number of ribs	Order no. clear finish	Order no. painted red
○	cm			
	Ø 300	8 parts	173 00 300 751	172 00 300 751
	Ø 350	8 parts	173 00 350 751	172 00 350 751
□	300×300	8 parts	173 00 301 751	172 00 301 751

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	C		
Ø 300	275	4.8	6.4	95	205	260	60×60	40	30 (5)
Ø 350	325	4.8	8.7	80	205	270	60×60	55	30 (5)
300×300	-	4.8	9.0	50	205	275	60×60	55	30 (5)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).
 The height dimensions are based on the ground socket PX (structure 15 cm). In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.
 The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.
 In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

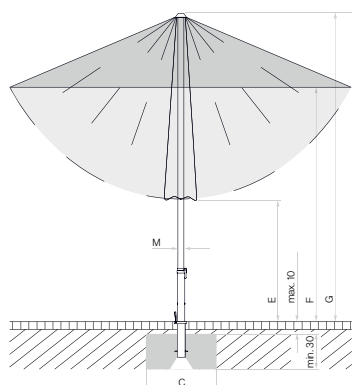

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage



Accessories		Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric			
1	Protective cover with zip and rod		350 01 609 978
Electrical accessories			
2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
Fixations			
Ground sockets			
4	Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
Wall consoles			
5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
Bases			
6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 111 116
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 112 116
6	¹ Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
6	Concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 111 216
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 112 216
7	Natural granite base Z, 40 kg, 50 × 50 × 8 cm, natural stone. Available from approx. March 2025. NEW	Support tube Z	350 01 109 467
7	Natural granite base Z, 55 kg, 59 × 59 × 8 cm, natural stone. Available from approx. March 2025. NEW	Support tube Z	350 01 109 447
8	³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
8	^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
9	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
9	Steel base Z 55 kg, 68.5 × 68.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
10	³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel Available from approx. february 2025. NEW		350 01 101 001
10	^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 101 000
Bases with castors			
11	^{1,3} Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
11	^{1,3} Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
12	^{3,7} Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 200
	^{3,7} 1 pallet (5 pieces) base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 280
13	Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
14	Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
Support tubes/Connection tubes			
15	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
15	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
15	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
16	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
17	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
16	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹ while stocks last

³ only suitable for smooth, joint free surface coverings

⁷ 55 kg: Ground clearance 7 mm

⁸ suitable for corrosive environments



Frame	<p>8 parts</p> <p>Full-length pole Ø 48 mm</p> <p>Pulley system for opening and closing, fixed with a metal pin</p> <p>Fabric corners reinforced with (white) leather</p> <p>Frame roof: round, square</p>
Frame colour	<p>Fabric quality 5, 4: eucalyptus wood, colourless varnish</p> <p>Fabric quality 2: eucalyptus wood, red varnish</p>
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 %</p> <p>Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p> <p>Fabric Quality 2: polyester, 220 g/m², UV protection > 98 %</p>
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyrion Spot LED with integrated battery pack



Usage locations



Type of fastening



Valid from 1.1.2025
glatz.com