

# PIAZZINO

The natural wooden parasol



# PIAZZINO



<b>Frame</b>	8 parts Pole Ø 48 mm Pulley system for opening and closing, fixed with a metal pin Fabric corners reinforced with (white) leather Frame roof: round, square
<b>Frame colour</b>	Fabric quality 5, 4: colourless-varnished eucalyptus wood Fabric quality 2: red-varnished eucalyptus wood
<b>Canopy</b>	Fabric quality 5: polyacrylic, 300 g/m <sup>2</sup> , UV protection > 98 % Fabric quality 4: polyester, 250 g/m <sup>2</sup> , UV protection > 98 % Fabric quality 2: polyester, 220 g/m <sup>2</sup> , UV protection > 98 %
<b>Flounce</b>	Only available without
<b>Protective cover</b>	Included in delivery
<b>Electrical accessories</b>	Osyron Spot LED with integrated battery pack



Using Locations



Fixations



# Assortment

	Nominal size without flounce	Number of ribs	Order no. clear finish	Order no. painted red
○	cm			
	Ø 300	8 parts	173 00 300 751	172 00 300 751
	Ø 350	8 parts	173 00 350 751	172 00 350 751
□	300×300	8 parts	173 00 301 751	172 00 301 751


Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m <sup>2</sup>	cm	cm	cm	cm	kg	km/h (wind force)
<b>A</b>	<b>AS</b>	<b>M</b>	<b>B</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>C</b>		
Ø 300	275	4.8	6.4	95	205	260	60×60	40	30 (5)
Ø 350	325	4.8	8.7	80	205	270	60×60	55	30 (5)
300×300	-	4.8	9.0	50	205	275	60×60	55	30 (5)

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5$  cm).


The height dimensions are based on the ground socket PX (structure 15 cm). In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

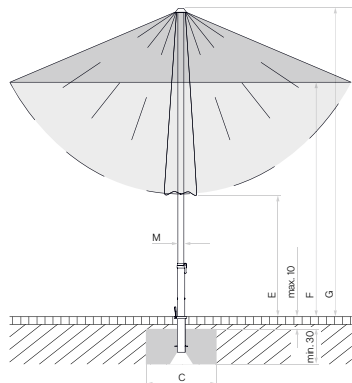

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage



8 parts



8 parts

## Accessories

Absolutely  
necessary

Order no.

### Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod		350 01 609 978
---	-----------------------------------	--	----------------

### Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

## Fixations

### Ground sockets

4	Ground socket PX, galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011

### Wall consoles

5	Wall bracket Z, 180 mm, galvanised steel	Support tube Z	350 01 205 000
---	--	----------------	----------------

### Bases

6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 533
6	Concrete base Z, 55 kg, Ø 60 × 11 cm	Support tube Z	350 01 109 528
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm	Support tube Z	350 01 109 534
7	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, galvanised steel	Support tube Z	350 01 100 210
	Add-on weight 30 kg, 57.5 × 57.5 × 1.7 cm, galvanised steel		350 01 100 310

### Bases with castors

8	<sup>3</sup> Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
8	<sup>3</sup> Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
9	<sup>3</sup> Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate) <small>NEW</small>	Support tube Z + Decorative plate	350 01 110 000
	Decorative plate in grey for base with castors Z, 55 kg, plastic <small>NEW</small>		350 01 110 110
	Decorative plate in anthracite for base with castors Z, 55 kg, plastic <small>NEW</small>		350 01 110 120
	Decorative plate in sand for base with castors Z, 55 kg, plastic <small>NEW</small>		350 01 110 130
10	<sup>1,3</sup> Base with castors Z, 55 kg, 65 × 65 × 11 cm, cast concrete decor	Support tube Z	350 01 102 900
	<sup>1,3</sup> 1 pallet (5 pieces) base with castors Z, 55 kg, Ø 65 × 65 × 11 cm, cast concrete decor	Support tube Z	350 01 102 950

### Support tubes/Connection tubes

11	Support tube Z, Ø 48 / 55 mm, galvanised steel		350 01 201 210
11	Support tube Z, Ø 48 / 55 mm, galvanised steel, powder coated anthracite		350 01 201 282
11	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
12	Connection tube PX, Ø 48 / 55 mm, galvanised steel		350 01 206 001
13	Connection tube PX, Ø 48 / 55 mm, galvanised steel, powder coated anthracite		350 01 206 082
12	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

<sup>1</sup> while stocks last

<sup>3</sup> only suitable for smooth, joint free surface coverings



1 2 3 4 5 6 7 8 9 10



11 12 13







Glatz AG  
Parasols  
2023 Season

[glatz.com](https://www.glatz.com)

