

SMART

Our modern compact parasol
with a minimalist design



Glatz 

Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame matt white	Order no. Frame anthracite
○	cm			
	Ø 200	6 parts	208 00 200 161	208 00 200 301
	Ø 220	8 parts	208 00 220 161	208 00 220 301
	Ø 250	8 parts	208 00 250 161	208 00 250 301
	Ø 300	8 parts	208 00 300 161	208 00 300 301
□	200×200	8 parts	208 00 201 161	208 00 201 301
	240×240	8 parts	208 00 241 161	208 00 241 301
□	210×150	6 parts	208 00 212 161	208 00 212 301
	250×200	6 parts	208 00 252 161	208 00 252 301


Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Clearance height, parasol part inclined	Total height, parasol inclined	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	K	L	C		
Ø 200	175	3.6	2.6	85...135	160...210	185...235	105...155	215...265	40×40	30	75 (9)
Ø 220	205	3.6	3.4	80...130	160...210	190...240	100...150	220...270	40×40	30	65 (8)
Ø 250	230	3.6	4.4	65...115	160...210	190...240	90...140	225...275	50×50	40	50 (7)
Ø 300	275	3.6	6.4	45...95	160...210	195...245	75...125	235...285	60×60	40	35 (5)
200×200	-	3.6	4.0	45...95	160...210	185...235	100...150	210...260	40×40	40	50 (7)
240×240	-	3.6	5.8	25...75	160...210	195...245	90...140	220...270	50×50	40	40 (6)
210×150	-	3.6	3.2	60...110	160...210	190...240	115...165	200...250	40×40	30	55 (7)
250×200	-	3.6	5.0	35...85	160...210	195...245	105...155	210...260	50×50	40	40 (6)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).


Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

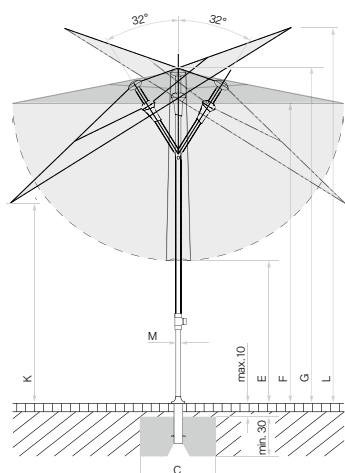


Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage




6 parts



8 parts



8 parts



6 parts



Accessories		Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric			
1	Protective cover with zip and rod		350 01 609 980
	10 pieces, protective cover with zip and rod		350 01 609 974
Electrical accessories			
2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
Fixations		Absolutely necessary	Order no.
Ground sockets			
4	Ground socket BT, hot-dip galvanised steel	Connection tube BT	350 01 206 100
Wall consoles			
5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
Bases			
6	Concrete base Z, 30 kg, Ø 47 × 10 cm, light concrete	Support tube Z	350 01 111 016
6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 111 116
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 112 116
6	¹ Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
7	1/2 Natural granite base Z, 30 kg, 50 × 33 × 7 cm, natural stone	Support tube Z	350 01 109 480
8	Natural granite base Z, 40 kg, 50 × 50 × 8 cm, natural stone. Available from approx. March 2025. NEW	Support tube Z	350 01 109 467
9	³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
9	^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
10	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
11	³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel Available from approx. february 2025. NEW		350 01 101 001
11	^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 101 000
Bases with castors			
12	^{1,3} Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
12	^{1,3} Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
13	^{3,7} Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
	^{3,7} 1 pallet (5 pieces) base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
14	Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
15	Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
Various fixation types			
16	Lawn spike Z, 85 × 150 × 350 mm, hot-dip galvanised steel	Support tube Z	350 01 205 400
17	Wall consoles U for the table top, Ø 31–40 mm, high-grade steel 1.4301 / 304, for horizontal flat railing, square profile up to 120 mm		350 01 252 005
Support tubes/Connection tubes			
18	Support tube Z, internal, Ø 30 / 25 mm, hot-dip galvanised steel		350 01 201 710
19	Connection tube BT, internal, Ø 30/25 mm, hot-dip galvanised steel, incl. cover matt white		350 01 201 916
20	Connection tube BT, internal, Ø 30/25 mm, hot-dip galvanised steel, incl. cover anthracite		350 01 201 930

¹ while stocks last

³ only suitable for smooth, joint free surface coverings


⁷ 55 kg: Ground clearance 7 mm

⁸ suitable for corrosive environments


SMART



Frame	6 or 8 parts Pole Ø 36 mm Premium design Function: internal support tube, quick opening and closing with clever sliding mechanism Infinitely variable height adjustment up to 50 cm, tilts 32° in both directions Ideal for balconies Canopy self-tensing through flexible rib ends Fabric corners reinforced with leather (Fabric Quality 5, 4) Frame roof: round, square, rectangular
Frame colour	Aluminium, matt white or anthracite powder-coated
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 %
Flounce	Only available without
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyron Spot LED with integrated battery pack



Usage locations



Type of fastening



SMART,
Int. Patents pend. ©Int. Design reg.

Valid from 1.1.2025
glatz.com