




SUNWING® Casa

The handy all-round parasol





Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural	Order no. Frame anthracite
	cm			
	Ø 300	8 parts	056 00 300 171	056 00 300 301
	Ø 330	8 parts	056 00 330 171	056 00 330 301
	270×270	8 parts	056 00 271 171	056 00 271 301
	300×240	8 parts	056 00 302 171	056 00 302 301

Nominal size	Lateral distance	Mast Ø	Area covered	Crank height	Height closed	Clear headroom	Total height	Height open	Overhang at the back	Length of free-arm	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	D ¹ / D ²	E	F	G ¹ / G ²	H	N	Z	C		
Ø 300	276	5.5	6.4	125 / 195	75	205	265 / 245	255	35	160	60×60	90	35 (5)
Ø 330	305	5.5	7.7	125 / 195	60	205	265 / 245	255	35	160	60×60	90	30 (5)
270×270	-	5.5	7.3	125 / 195	35	205	265 / 245	255	35	160	60×60	90	30 (5)
300×240	-	5.5	7.2	125 / 195	35	205	265 / 245	255	35	160	60×60	90	35 (5)



The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The measures of the height are determined by the PX ground socket. If one of the offered bases is used, these measures change only slightly.


With the base variant these vary slightly. With the variants with the ground sockets M4 and mounting plate M4 / M8, the stated height dimensions vary by 12–13 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

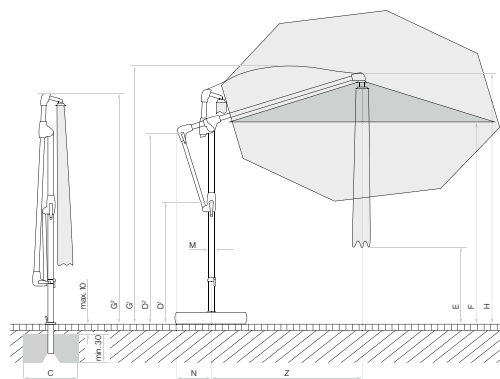

8 parts



8 parts



8 parts

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth),
Guarantee water drainage

Accessories

**Absolutely
necessary**

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod		350 01 609 702
	5 pieces, protective cover with zip and rod		350 01 609 703

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

**Absolutely
necessary**

Order no.

Ground sockets

4	Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
5	Ground socket M4, hot-dip galvanised steel	Support tube M4	350 01 226 510

Mounting plates

6	Mounting plate M4 / M8, 30 × 30 × 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
7	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
8	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
9	Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure (higher on request), hot-dip galvanised steel <small>NEW</small>	Support tube M4	350 01 222 510

Wall consoles

10	Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4	350 01 229 405
----	---	-----------------	----------------



Accessories		Absolutely necessary	Order no.
Bases			
11	Concrete base Z, 90 kg, Ø 75 × 11 cm, light concrete	Support tube Z	350 01 111 416
	1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75 × 11 cm, light concrete	Support tube Z	350 01 112 416
12	Base frame M4, 120 kg, (for 8 plates 40 × 40 × 4 cm), 91 × 91 × 11.5–15.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4	350 01 108 235
	Slab set, 8 pieces, 40 × 40 × 4 cm, (approx. 110 kg), concrete		350 01 226 908
	Slab set, 8 pieces, 40 × 40 × 4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
13	Cover for M4 base 120 kg, 96 × 96 × 11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
14	Cover for M4 base 120 kg, 96 × 96 × 11.5 cm, plastic ABS coated, anthracite		350 01 100 630
	^{3,6} Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
15	Natural granite base Z, 90 kg, 75 × 75 × 8 cm, natural stone NEW	Support tube Z	350 01 109 485
16	³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
16	^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
Bases with castors			
17	^{3,7} Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4 + decorative plate	350 01 113 610
18	^{3,7} Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4 + decorative plate	350 01 113 620
	Weight Set for base with castors M4, 120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)		350 01 110 500
19	Decorative plate in grey white RAL 9002 for base with castors M4, 120 kg, aluminium composite		350 01 113 710
20	Decorative plate in anthracite RAL 7016 for base with castors M4, 120 kg, aluminium composite		350 01 113 720
Support tubes/Connection tubes			
21	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
21	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
21	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
22	Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
22	Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 200 082
23	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
24	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
23	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹ while stocks last

³ only suitable for smooth, joint free surface coverings

⁶ Not suitable for cover for M4 base

⁷ 120 kg: Ground clearance 13 mm


⁸ suitable for corrosive environments



Frame	<p>8 parts</p> <p>Mast profile 55 × 2.5 mm</p> <p>Crank drive for opening and closing</p> <p>Crank for stepless tilting of roof in both directions (45°)</p> <p>Crank housing, support arm guide and head made from robust die-cast aluminium</p> <p>Screws and rivets made from stainless steel</p> <p>Canopy self-tensing through flexible rib ends</p> <p>Frame roof: round, square, rectangular</p>
Frame colour	Aluminium, anodised or anthracite powder-coated
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 %</p> <p>Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p> <p>Fabric Quality 2: polyester, 220 g/m², UV protection > 98 %, (only in anthracite frame)</p>
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyron Spot LED with integrated battery pack



Usage locations



Type of fastening



SUNWING® Casa
© Int. Design reg.

Valid from 1.1.2025
glatz.com