

# TEAKWOOD

The elegant masterpiece in precious timber



**Glatz** 

## Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame teak
○	cm		
	Ø 300	8 parts	166 00 300 731
	Ø 350	8 parts	166 00 350 731
□	330×330	8 parts	166 00 331 731



Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m <sup>2</sup>	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	C		
Ø 300	275	4.8	6.4	135	220	285	60×60	40	30 (5)
Ø 350	325	4.8	8.7	105	215	285	60×60	55	30 (5)
330×330	-	4.8	10.9	45	220	285	60×60	70	30 (5)

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5$  cm).


The height dimensions are based on the ground socket PX. In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

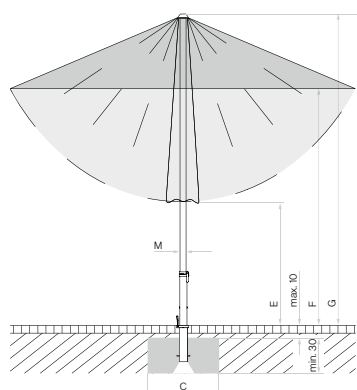

8 parts



8 parts

Loose cover max. 10 cm, concrete thickness  
min. 30 cm (pay attention to frost depth),  
Guarantee water drainage

## Accessories

**Absolutely  
necessary**

**Order no.**

### Protective cover made of coated, tear-resistant polyester fabric

1 Protective cover with zip and rod

350 01 609 979

### Electrical accessories

2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger

350 01 563 000

3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger

350 01 563 100



1



2



3



4



5



6



7



8



9



10

## Fixations

		Absolutely necessary	Order no.
<b>Ground sockets</b>			
4	Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
<b>Wall consoles</b>			
5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
<b>Bases</b>			
6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 111 116
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 112 116
	<sup>1</sup> Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
6	Concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 111 216
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 112 216
6	Concrete base Z, 70 kg, Ø 75 × 9 cm, light concrete	Support tube Z	350 01 111 316
7	Natural granite base Z, 40 kg, 50 × 50 × 8 cm, natural stone Available from approx. March 2025. NEW	Support tube Z	350 01 109 467
7	Natural granite base Z, 55 kg, 59 × 59 × 8 cm, natural stone Available from approx. March 2025. NEW	Support tube Z	350 01 109 447
7	Natural granite base Z, 90 kg, 75 × 75 × 8 cm, natural stone NEW	Support tube Z	350 01 109 485
8	<sup>3</sup> Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel NEW		350 01 109 487
8	<sup>3,8</sup> Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 109 486
9	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
9	Steel base Z 55 kg, 68.5 × 68.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
10	<sup>3</sup> Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel Available from approx. february 2025. NEW		350 01 101 001
10	<sup>3,8</sup> Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304 NEW		350 01 101 000
<b>Bases with castors</b>			
11	<sup>1,3</sup> Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
11	<sup>1,3</sup> Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
12	<sup>3,7</sup> Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
	<sup>3,7</sup> 1 pallet (5 pieces) base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
13	Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
14	Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
<b>Support tubes/Connection tubes</b>			
15	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
15	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
15	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
16	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
17	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
16	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

<sup>1</sup> while stocks last

<sup>3</sup> only suitable for smooth, joint free surface coverings

<sup>7</sup> 55 kg: Ground clearance 7 mm

<sup>8</sup> suitable for corrosive environments



11



12



13



14



15



16



17


# TEAKWOOD



<b>Frame</b>	8 parts Full-length pole Ø 48 mm Wood-swell protection through metal bridge at the transition to the support tube Pulley system for opening and closing, fixed with a metal pin With rustproof fittings Fabric corners reinforced with leather Frame roof: round, square
<b>Frame colour</b>	Fine teak
<b>Canopy</b>	Fabric Quality 5: polyacrylic, 300 g/m <sup>2</sup> , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m <sup>2</sup> , UV protection > 98 %
<b>Flounce</b>	Only available without
<b>Protective cover</b>	Included in delivery
<b>Electrical accessories</b>	Osyrion Spot LED with integrated battery pack



Usage locations



Type of fastening



Valid from 1.1.2025  
[glatz.com](https://www.glatz.com)